

MIG/MAG Welding Torch MB 15 AK air-cooled



BINZEL. The right welding torch for every job!

BINZEL air cooled welding torches incorporate the high quality and technology needed for trouble-free performance whatever the welding job. All BINZEL torches are constructed to the highest standards and offer the greatest working comfort.

BINZEL torch features:

- Optimum cooling of the torch, extending torch life
- An ergonomic handle, ensuring comfort in every position
- Light and flexible cable assemblies, designed to reduce fatigue

Technical data (EN 50 078):

Rating: 180 A CO₂
150 A Mixed Gases M 21 (DIN EN 439)
60% Duty Cycle
Wire sizes: 0.6 - 1.0

- Robust construction for durability and extended torch life
- A connecting system that allows easy torch changeover



Rated using power source with VDE standard volt/amp characteristic (U=14+0,05xI).
When pulse welding, reduce rating by 35%.

Type	Handle/Version	3.00 m long	4.00 m long	5.00 m long
		Part no.	Part no.	Part no.
MB 15 AK	Ergonomic	002.0449	002.0450	002.0451
AUT 15 AK	Handle tube, straight	902.0022	Special lengths upon request!	
	Handle tube, bent	902.0023		

NB: MB 15 AK and AUT 15 AK also available with screw gas nozzle.

Welding & cutting brought to the point.



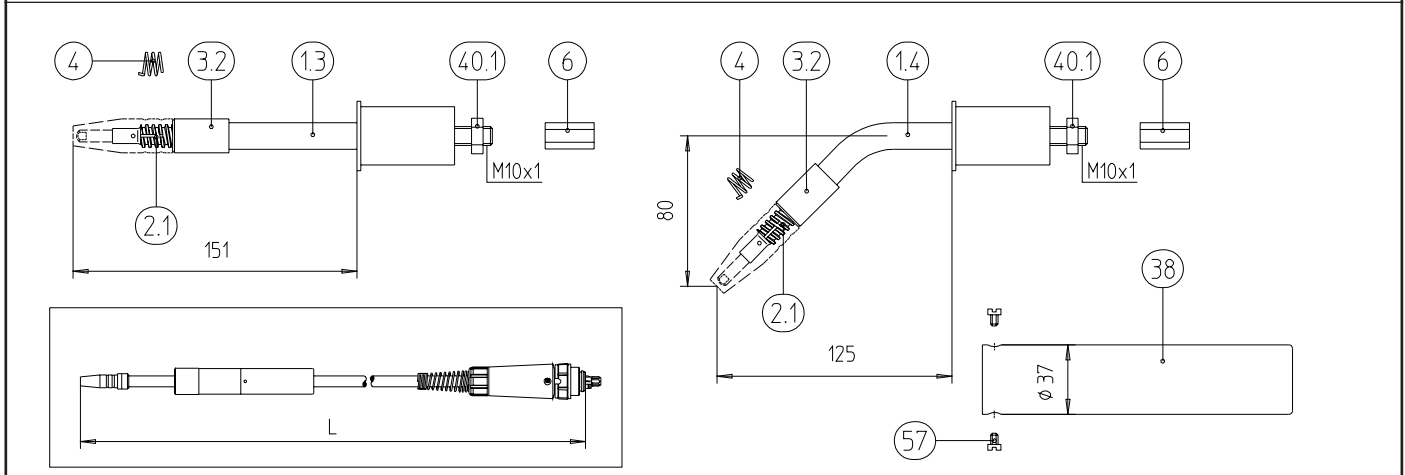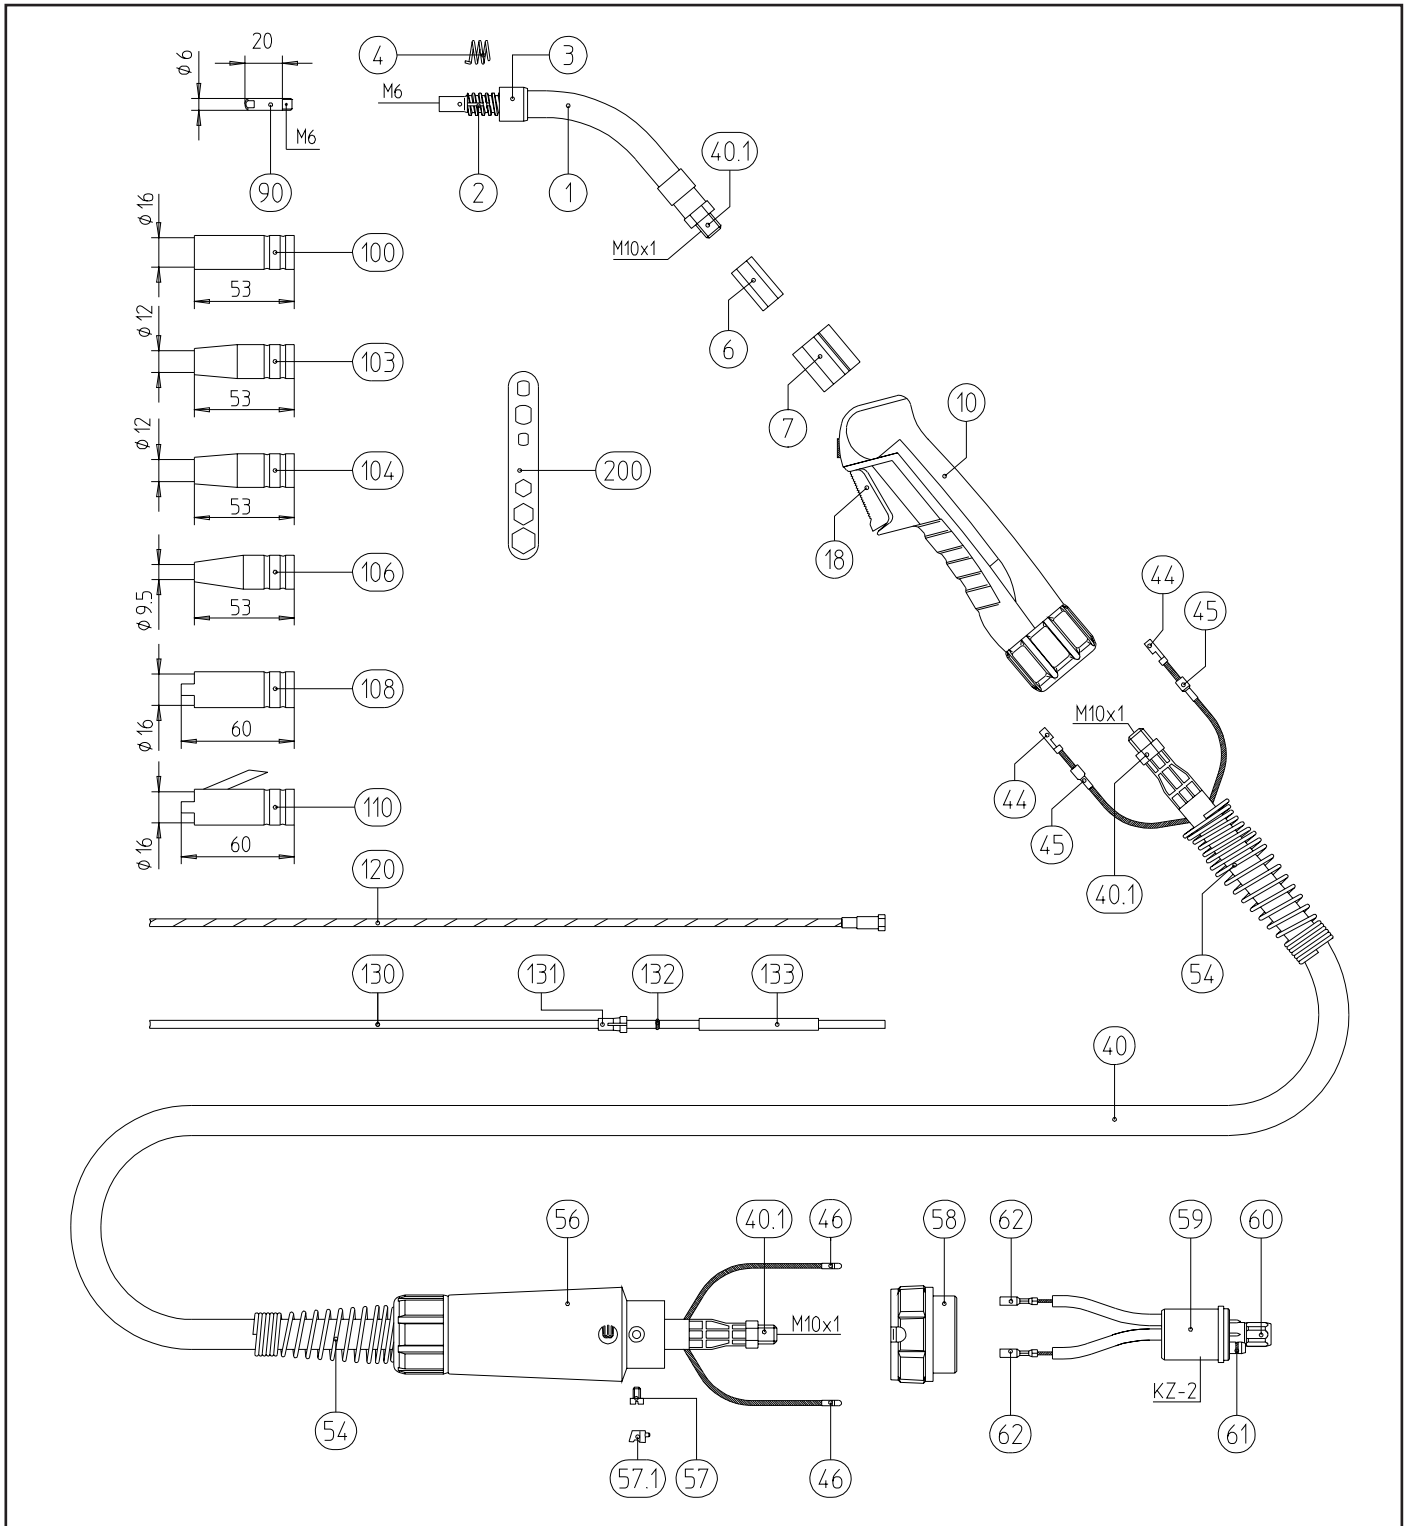

Build group	Pos.	Description	Specifications	Part no.	
Torch	1	Swan neck MB 15 AK, 50° bent		002.0009	
	w/o. fig.	Swan neck MB 15 AK, flexible		002.0029	
	1.3	Swan neck AUT 15 AK, straight		902.0003	
	1.4	Swan neck AUT 15 AK, 45° bent		902.0004	
	2	Gas nozzle holder M6/M8x1 links, industrial handle		002.0078	
	2.1	Gas nozzle holder AUT 15 AK; M6/M10x1, industrial handle		902.0007	
	3	Head insulator	10 pcs.	002.0050	
	3.2	Head insulator		902.0015	
	4	Nozzle spring	20 pcs.	002.0058	
	6	Torch body, brass		400.0114	
	7	Torch body, plastic		400.0044	
	Handle	10	Ergonomic handle, cpl., with trigger		180.0076
			Handle, top		400.0333
		Handle, bottom		400.0335	
		Lock ring NW 31		400.0297	
		Screw 18x8	20 pcs.	400.0340	
		Screw 3.5x9.5	20 pcs.	079.0034	
18		Trigger 2 pol.		185.0031	
38		Handle tube AUT		180.0001	
Cable assembly	40	Bikox power cable 3.00 m	B4	160.0065	
		Bikox power cable 4.00 m	B4	160.0078	
		Bikox power cable 5.00 m	B4	160.0091	
	40.1	Hexagon nut M10x1	10 pcs.	001.0009	
	44	Trigger wire connector	20 pcs.	175.0022	
	45	Insulating sleeve	20 pcs.	400.0119	
	46	Trigger wire connector, male	20 pcs.	175.0004	
	54	Cable support spring NW 19		500.0225	
	56	Cable support machine side		501.2248	
	57	Screw M4x6	20 pcs.	000.0552	
	57.1	Covering cap 1	20 pcs.	500.0251	
	58	Adaptor nut		500.0213	
	59	Central adaptor block KZ-2 with control leads		501.0003	
		Central adaptor block KZ-2 without control leads		501.0028	
	60	Nut M10x1	10 pcs.	501.0082	
	61	O-ring 4x1	20 pcs.	165.0002	
62	Trigger wire connector, female	20 pcs.	175.0003		
Wear parts	90	Contact tip M6 E-Cu, Ø 0.6	10 pcs.	140.0008	
		Contact tip M6 E-Cu, Ø 0.8 ³⁾	• 10 pcs.	140.0059	
		Contact tip M6 E-Cu, Ø 1.0 ³⁾	10 pcs.	140.0253	
		Contact tip M6 CuCrZr, Ø 0.6	10 pcs.	140.0855	
		Contact tip M6 CuCrZr, Ø 0.8	10 pcs.	140.0062	
		Contact tip M6 CuCrZr, Ø 1.0	10 pcs.	140.0256	
		Contact tip M6 E-Cu, Ø 0.8 for alu wire	10 pcs.	141.0002	
		Contact tip M6 E-Cu, Ø 1.0 for alu wire	10 pcs.	141.0007	

Build group	Pos.	Description	Specifications	Part no.
Wear parts	100	Gas nozzle, cylindrical ND Ø 16.0	10 pcs.	145.0041
	103	Gas nozzle, conical ND Ø 12.0	• 10 pcs.	145.0075
	104	Gas nozzle, conical, with extended insulation ND Ø 12.0	10 pcs.	145.0107
	106	Gas nozzle, conical ND Ø 9.5	10 pcs.	145.0123
	108	Spot weld, gas nozzle ND Ø 16.0	10 pcs.	145.0168
	110	Spot weld, gas nozzle for stud. welding ND Ø 15.0	10 pcs.	145.0186
	120	Guide spiral liner blank 1.5/4.5 blue with nipple for wire ¹⁾ Ø 0.6-0.8	• for 3.00 m • for 4.00 m • for 5.00 m	124.0011 124.0012 124.0015
		Guide spiral liner blank 2.0/4.5 red with nipple for wire ¹⁾ Ø 1.0-1.2	for 3.00 m for 4.00 m for 5.00 m	124.0026 124.0031 124.0035
	130	Teflon core liner 1.5/4.0 blue with collet and o-ring for wire ²⁾ Ø 0.6-1.0	for 3.00 m for 4.00 m for 5.00 m	126.0005 126.0008 126.0011
		Teflon core liner 2.0/4.0 red with collet and o-ring for wire ²⁾ Ø 1.0-1.2	for 3.00 m for 4.00 m for 5.00 m	126.0021 126.0026 126.0028
		Carbon Teflon core liner 1.5/4.0 with collet and o-ring for wire ²⁾ Ø 0.6-1.0	for 3.00 m for 4.00 m for 5.00 m	127.0002 127.0003 127.0004
		Carbon Teflon core liner 2.0/4.0 with collet and o-ring for wire ²⁾ Ø 1.0-1.2	for 3.00 m for 4.00 m for 5.00 m	127.0005 127.0007 127.0008
	131	Collet for core liner at Ø 4.0	20 pcs.	131.0001
	132	O-ring 3.5x1.5	20 pcs.	165.0008
	133	Guide tube for core liners up to Ø 4.0	200 mm	129.0461
	200	Spanner	10 pcs.	191.0001

¹⁾ Applicable for GMA welding of un-alloyed and low alloyed steels (DIN 8555 and 8559).

²⁾ Applicable for GMA welding of aluminium (DIN 1732), copper and copper alloys (DIN 1733) and nickel/nickel alloys (DIN 1736); Also for use with GMA welding of stainless and heat resistant steels (DIN 8556).

³⁾ As an alternative: Packing unit 50 pcs. Specification of order: 140.xxxx.50 or 141.xxxx.50.

• Standard - Equipment

The positions indicating "per meter" are available in commercial lengths.

Welding & cutting brought to the point.



Alexander Binzel Schweisstechnik GmbH & Co. KG
 P.O. Box 10 01 53 · D-35331 Giessen
 Tel.: ++49 (0) 64 08 / 59-0
 Fax: ++49 (0) 64 08 / 59-194
 Internet: www.binzel-abicor.com

