

TIG Welding Torch SR 24 G air cooled



BINZEL. The right welding torch for every job!

BINZEL air cooled welding torches have the high quality and technology needed for trouble-free performance whatever the welding job.

All BINZEL torches are constructed to the highest standards and offer the greatest working comfort. This brochure defines in detail all the possible options for the above TIG torch types.

Technical Data:

SR 24 G
Rating: 110 A DC
95 A AC
Tungsten electrode: \varnothing 0,5 - 1,6 mm

As each torch type has very many variations, we cannot list them all here. Therefore, we indicate only one stan-


dard for each type of torch.

Type	Handle version	4,00 m long Part no.	8,00 m long Part no.
SR 24 G	with single connection, single action switch and 3-pole Tichel connector	705.0483*	705.0484*


* This part number is a sample, only, which refers to the mentioned „Standard version“. To other torch variations new order numbers will be given. See order confirmation.

Welding & cutting brought to the point.



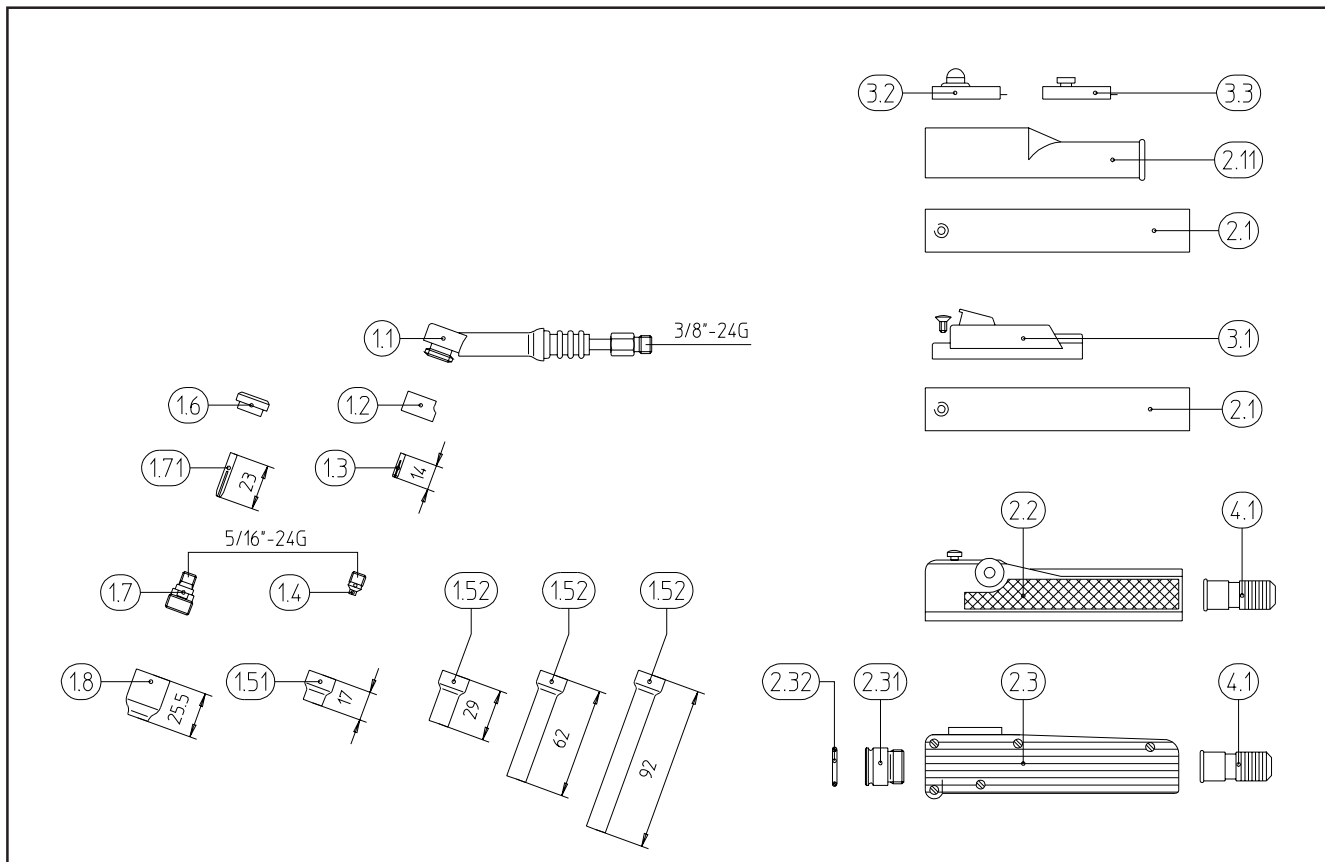

Build group	Pos.	Description	Specifications	Part no.
Torch body	1.1	Torch body SR 24 G		705.0075
Wear parts	1.2	Insulator gasket		701.0458
	1.3	Collet 14.0 mm long for electrode- Ø 0.5 mm Collet 14.0 mm long for electrode- Ø 1.0 mm Collet 14.0 mm long for electrode- Ø 1.2 mm Collet 14.0 mm long for electrode- Ø 1.6 mm		701.0452 701.0453 701.0455 701.0454
	1.4	Collet body for electrode- Ø 0.5 mm Collet body for electrode- Ø 1.0 mm Collet body for electrode- Ø 1.2 mm Collet body for electrode- Ø 1.6 mm		701.0479 701.0480 701.0483 701.0481
	1.51	Alumina cup, no. 4, Ø 6.5 mm, 17.0 mm long Alumina cup, no. 5, Ø 8.0 mm, 17.0 mm long Alumina cup, no. 6, Ø 9.5 mm, 17.0 mm long		701.0468 701.0469 701.0470
	1.52	Alumina cup, no. 4L, Ø 6.5 mm, 29.0 mm long Alumina cup, no. 6L, Ø 9.5 mm, 29.0 mm long Alumina cup, no. 4L, Ø 6.5 mm, 62.0 mm long Alumina cup, no. 5L, Ø 8.0 mm, 92.0 mm long		701.0471 701.0472 701.0473 701.0474
		Gas lens accessories		
	1.6	Insulator		701.0459

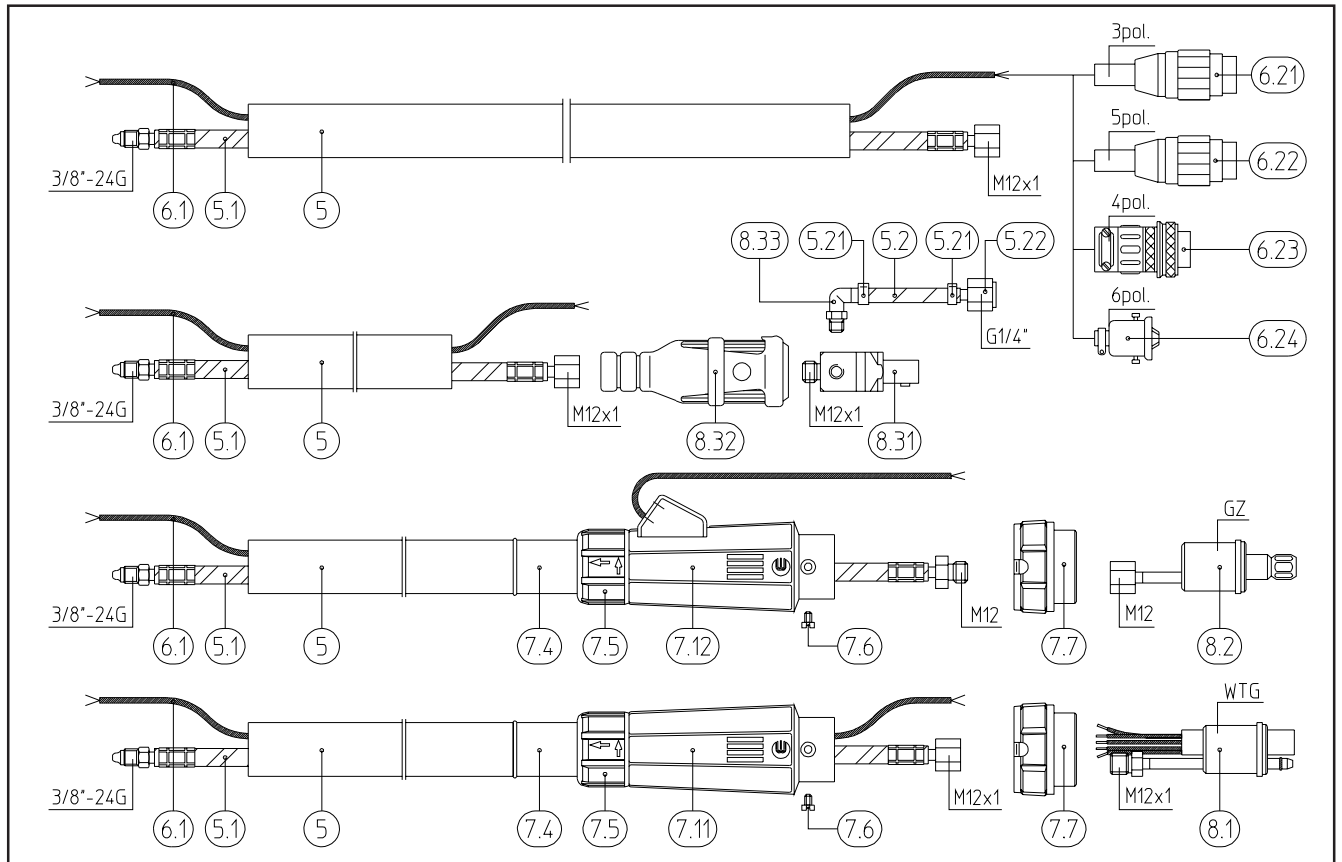

Build group	Pos.	Description	Specifications	Part no.
Wear parts	1.7	Collet body with gas lens for electrode- Ø 0.5-1.0 mm		701.0301
		Collet body with gas lens for electrode- Ø 1.2 mm		701.0313
		Collet body with gas lens for electrode- Ø 1.6 mm		701.0307
	1.71	Collet 23.0 mm long for electrode- Ø 0.5 mm		701.0461
		Collet 23.0 mm long for electrode- Ø 1.0 mm		701.0462
		Collet 23.0 mm long for electrode- Ø 1.2 mm		701.0464
		Collet 23.0 mm long for electrode- Ø 1.6 mm		701.0463
	1.8	Alumina cup, no. 4, Ø 6.5 mm, 25.5 mm long		701.0317
		Alumina cup, no. 5, Ø 8.0 mm, 25.5 mm long		701.0318
		Alumina cup, no. 6, Ø 9.5 mm, 25.5 mm long		701.0319
	Alumina cup, no. 7, Ø 11.0 mm, 25.5 mm long		701.0320	
Handle and switch	2.1	Handle tube		705.0010
	2.11	Rubber boot		701.0105
	2.2	Handle with single action switch		705.0023
		Handle with double action switch		705.0024
		Handle with single action switch and potentiometer (Resistore must be specified)		705.0014
		Consisting of:		
		Handle		705.0636
		Screw 2.2x13	20 pcs.	079.0006
		Bung		705.0019
		Incher housing, single switch		705.0339
	Incher housing, double switch		705.0526	
	Micro switch		185.0011	

Build group	Pos.	Description	Specifications	Part no.
Handle and switch		Knurled knob for potentiometer		705.0020
		Screw M3x6 for potentiometer	20 pcs.	005.0057
		Potentiometer with nut (Resistore must be specified)		187.xxxx
	2.3	MG-handle with single action switch		701.0133
		MG-handle with double action switch		701.0698
		Consisting of:		
		Handle with switch		701.0134
		Micro switch		185.0011
		Pressure spring	20 pcs.	701.0987
		Cylinder pin 2m6x8	20 pcs.	063.0001
		Screw 2.2x13	20 pcs.	079.0005
		O-ring 17x2.5	20 pcs.	165.0040
	2.31	Insert bush		705.1442
	2.32	O-ring 17x2.5	20 pcs.	165.0040
	3.1	Binzel switch		701.0140
		Countersunk screw M4x6	20 pcs.	009.0201
	3.2	Rubber switch		185.0013
	3.3	Double switch		185.0015
	4.1	Cable support		701.0139
	Cable assembly	5	Outer cover rubber Ø 20x1.5	per meter
5.1		Power cable air-cooled for 4.00 m (Single connection/BSB/WTG)		116.0073
		Power cable air-cooled for 8.00 m (Single connection/BSB/WTG)		116.0074
		Power cable air-cooled for 4.00 m (GZ)		116.0071
		Power cable air-cooled for 8.00 m (GZ)		116.0072
5.2		Hose 22 black Ø 5.0x1.5	per meter	109.0032
5.21		Hose clamp Ø 8.7 mm	20 pcs.	171.0002
5.22		Nut G 1/4"		500.0082
		Nipple for G 1/4"		720.0017
6.1		Control cable 2-pole protected	per meter	100.0017
		Control cable 2-pole unprotected	per meter	100.0019
		Control cable 3-pole protected	per meter	100.0022
		Control cable 3-pole unprotected	per meter	100.0023
		Control cable 5-pole protected	per meter	100.0028
w/o fig.		Electric-Insulation hose 6x0,5 (for unprotected control cable 100.0019 and 100.0023)	per meter	110.0004
6.21		Tuchel plug 3-pole		175.0009
6.22		Tuchel plug 5-pole		175.0011
6.24		Harting plug 6-pole		175.0013
6.23		Amphenol plug 4-pole Other plug types are available on request.		175.0006

Build group	Pos.	Description	Specifications	Part no.
Cable assembly	7.11	Connecting case complete		500.0340
	7.12	Connecting case complete (Hose passage w/o hole)		500.0341
	7.4	Cable support		400.0101
	7.5	Locking ring NW 31		400.0297
	7.6	Screw M4x6	20 pcs.	000.0552
	7.7	Adaptor nut		500.0213
	8.1	Central adaptor block WTG 5-pole		501.0059
	8.2	Central adaptor block WIG-GZ		501.0039
		BSB Plug with side entry		500.0177
		Consisting of:		
	8.31	Power fitting		500.0060
	8.32	Rubber insulator		500.0141
	8.33	Hose fitting		500.0255

Welding & cutting brought to the point.



Alexander Binzel Schweißtechnik GmbH & Co. KG
P.O. Box 10 01 53 · D-35331 Gießen
Tel.: ++49 (0) 64 08 / 59-0
Fax: ++49 (0) 64 08 / 59-191
Internet: www.binzel-abicor.com